



Easidew

Transmitter

From the Impedance Range

A low cost, rugged impedance dew-point transmitter for continuous measurement of compressed air or process gas



*Easidew
Transmitter*

Features

- Calibrated -100 to +20 °C dp
- Fast and reliable
- Small footprint, IP65 (NEMA 4X) rated, IP66 (NEMA 4X) option
- Weighs only 150 g
- 12 to 28 V dc operation
- Linear 4-20 mA signal
- Reverse polarity protected

Design Simplicity and Economy

The Easidew Transmitter is designed for ease of use, incorporating all the features you want to make installation and operation as simple as possible. For the first time, dew point measurement is made as accessible as temperature and pressure with this fully configured, calibrated transmitter that can be instantly incorporated into your air or gas management and control system.

Easidew Transmitter is also economical to buy, install and operate. Installation costs are minimal because of its ruggedness and simplicity. On-going operating costs are low, because Easidew Transmitter is very reliable and stable. Only periodic re-certification is required to maintain your traceability. We can even organise an exchange programme for you so that your process is never out of operation.

Advanced Technology

The key to the Easidew Transmitter's performance is its sensor technology. Michell's Advanced Ceramic Moisture Sensor is coupled with advanced microprocessor based measurement circuitry to produce a fully calibrated and interchangeable sensor transmitter. All calibration data is stored within the transmitters flash memory and so calibration exchange or service can be effected in seconds, even by untrained personnel. The Easidew Transmitter is simply disconnected, removed from its sampling block and replaced by a new, fully calibrated unit. Furthermore, the Easidew Transmitter forms the front-end of both the Easidew On-Line and Portable Hygrometers. Total flexibility, interchangeability and ease of implementation.

Air and Gas Quality Measurement

The Easidew Transmitter is calibrated traceable to International Standards in Michell's UKAS accredited laboratory at thirteen points over the range -100 to +20 °C dew point, to an accuracy of ± 2 °C dew point. The inherent stability of our advanced Ceramic Moisture Sensor means that the Easidew Transmitter will give years of reliable operation, with only the need for a periodic calibration to maintain traceability - vital for conformance with your own quality standards. Easidew Transmitter is also fast to respond, ensuring that your process is always monitored in real time.

Simple Operation

Easidew Transmitter is so easy to install and operate. Powered by any dc source from 12 to 28 volts, it provides the user with a linear 4-20 mA signal calibrated from -100 to +20 °C dew point. So, once the input and output connection is made, the transmitter only needs a sample of air or process gas and measurements can be taken. As the Easidew Transmitter measures the water vapour pressure in the gas sample, it will give the user an accurate determination of the actual dew point conditions presented to it - at any pressure up to 30 MPa. Flow rate is not critical to measurement accuracy (1 to 5 NL/min), though speed of response will of course be improved by operating a higher sample flow.



The Dew Point Specialists



Rugged yet Lightweight

The Easidew Transmitter is constructed in 316 grade stainless steel, with a captive sealed, glanded cable connector and offers IP65 (NEMA 4X) protection from the environment. This rugged construction makes it perfectly suited for industrial applications whilst, weighing only 150 g, it is light enough to be supported directly by its connection to a 6 mm or ¼ inch sample pipe without any additional mounting brackets. Again, design for operation is a key benefit.

Self-Diagnostics

In the unlikely event that something goes wrong, the microprocessor embedded within Easidew provides you with intelligent information on the failure mode. Sensor fault, under-range and over-range conditions are all signalled by pre-determined output levels so you can easily establish the source of the problem, rectify it and get back to operation as quickly as possible.

The Easidew Range


We offer a family of low cost hygrometer products based on our advanced ceramic technology providing on-line and portable dew point measurement. Because all three products use the same transmitter, interchangeability is made so simple. If you need to monitor various points in your process - some with local display, others with direct mA feed to a central control system, the Easidew range is ideal. The Easidew Portable Hygrometer allows local spot checks to be carried out when necessary, perhaps at the point of use of the air or process gas. Easidew On-Line Hygrometer provides continuous in-process measurement of gas dew point. In order to maintain traceability, you only need to stock one sensor type for all three products - the Easidew Transmitter. Call us for further information on the full Easidew Range.

From the Impedance Range

Technical Specifications

<i>Sensor type</i>	<i>Michell Advanced Ceramic Moisture Sensor</i>	
<i>Calibration range</i>	<i>-100 to +20 °C dew point</i>	
<i>Power supply</i>	<i>12-28 V dc</i>	
<i>Output</i>	<i>4-20 mA current source over the entire dew-point range</i>	
<i>Interchangeability</i>	<i>Fully interchangeable transmitters</i>	
<i>Accuracy</i>	<i>±2 °C dew point</i>	
<i>Operating temp</i>	<i>-40 to +60 °C</i>	
<i>Temp coefficients</i>	<i>Temperature compensated</i>	
<i>Operating pressure</i>	<i>30 MPa</i>	
<i>Flow rate</i>	<i>1 to 5 Nlmin⁻¹ mounted in standard sampling block; 0 to 10 msec⁻¹ direct insertion (80 µm sintered guard)</i>	
<i>Traceable certification</i>	<i>-75 to +20 °C dew point traceable to NPL (UK) and NIST (USA). [For dew points < -75 °C: direct reference to a fundamental cooled mirror dew-point hygrometer.]</i>	
<i>Environmental protection</i>	<i>IP65 (NEMA 4X) with standard connector (IP66 (NEMA 4X) with optional moulded connector)</i>	
<i>Weight</i>	<i>0.15 kg</i>	
<i>Fault conditions (factory programmed)</i>	Condition	Output
	<i>Sensor fault</i>	<i>23 mA</i>
	<i>Under-range dew point</i>	<i>4 mA</i>
	<i>Over-range dew point</i>	<i>20 mA</i>

Dimensions

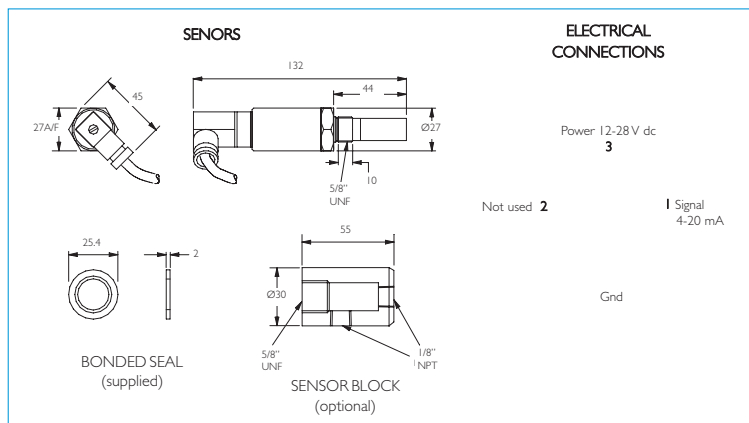

Dimensions mm

Easidew Transmitter - Ref: ET-05-01

Michell Instruments Ltd
 Nuffield Close, Cambridge CB4 1SS UK
 Tel: +44 (0)1223 434800 Fax: +44 (0)1223 434895
 e-mail: info@michell.co.uk
 www.michell-instruments.com



Q6284 (UK)



0179 (UK)



The Dew Point Specialists